


- Dual LTE-A with GPS
- Enterprise-grade Wi-Fi Access Point
- Compute and storage to host applications
- Vehicle interfaces to connect vehicular network to cloud
- Edge computing to enable IoT applications
- Integrated sensor capabilities, such as ODB-II/j1939 and gyroscope, that provide driver safety and vehicle performance monitoring

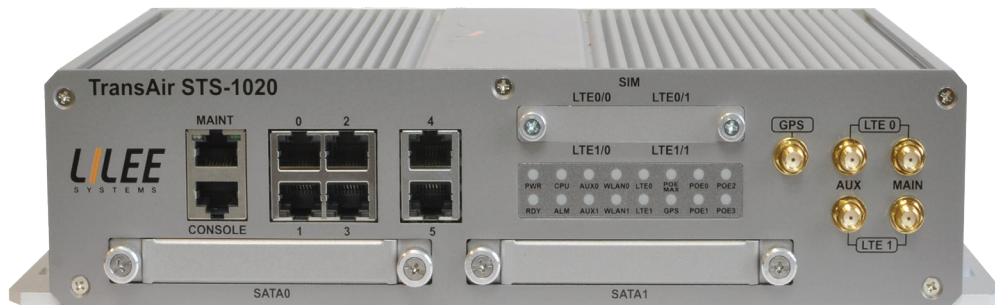

### SKU

**STS-1020**

**STS-1020-A**

### DESCRIPTION

Multi-service Mobile Gateway with 2 LTE-A (North America and Europe), 2 Wi-Fi (802.11a/b/g/n/ac), PoE+ and Application Engine

Multi-service Mobile Gateway with 2 LTE-A (APAC), 2 Wi-Fi (802.11a/b/g/n/ac), PoE+ and Application Engine

The LILEE Systems TransAir™ STS-1020 is an enterprise-class vehicle communications gateway that provides Internet connectivity to onboard applications. The STS-1020 provides wired and wireless connectivity to onboard devices, vehicle to ground, and ground to the back office. The built-in Wi-Fi Access Point provides dual band (2.4/5 GHz) 802.11ac connectivity and Power over Ethernet (PoE). In addition, it has Gigabit Ethernet (GbE) ports to provide wired connectivity to both passenger and operational devices.

LileeOS, software running on STS, provides security, Quality of Service (QoS), traffic segmentation and management, application isolation and link aggregation. The dynamic weighted load balancing (DWLB) aggregates bandwidth simultaneously

across LTE, Wi-Fi, and Ethernet, allowing the highest amount of throughput at the lowest possible cost – ideal for running multiple onboard applications that demand high-throughput and reliable connectivity.

LILEE Systems T-Cloud, the simple, intuitive, flow-based and cloud-based management, provides monitoring, onboarding, and configuration of onboard devices, connectivity, and edge and cloud applications. A wide range of interface options combined with the flexibility to run applications directly on the STS accelerates custom application development. The open platform enables easy integration of third-party applications, such as CAD/AVL, e-log (electronic logging), and onboard entertainment.

# STS-1020 Specifications

## Processor / Memory / Storage

Quad-Core Processor  
4 GB on board memory  
2 x SATA SSD 2.5" disk bays (32 GB included in SATA0)

## LTE Interfaces

2 x LTE CAT 6 (LTE-A) to support up to 300 Mbps each  
4 x SIM card slots  
4 x Antenna connectors (2 per LTE 2 x 2 MIMO)  
LTE Band Support in North America and Europe -  
B1,B2,B3,B4,B5,B7,B8,B12,B13,B20,B25,B26,B29,B30,B41  
LTE Band Support in APAC -  
B1,B3,B5,B7,B8,B18,B19,B21,B28,B38,B39,B40,B41  
Advanced Satellite System support -  
GPS (US), Glonass (Russia), Beidou (China), Galileo (EU)  
1 x GPS antenna connector

## Wi-Fi Interfaces

2 x 802.11 ac/a/n (5 GHz) b/g/n (2.4 GHz) interfaces support up to 1.3 Gbps  
6 x WLAN antenna connectors (3 x 3 MIMO)  
Support for up to 128 clients per radio  
Up to 8 SSIDs per radio  
Dual radio mode (AP or client)  
Automatic or manual channels selection

## Onboard Sensors

3-axis gyroscope and 3-axis accelerometer

## Physical Interfaces

1 x HDMI connector (audio and video)  
1 x DB15 connector to provide OBD-II (for small vehicles) and J1939 (for buses)  
1 x Digital I/O connector (1 true ignition digital input, 3 digital-in, 2 digital-out, 6 GND)  
1 x USB 2.0  
1 x USB 3.0  
6 x 10/100/1000 Mbps Ethernet ports – 4 of the ports PoE 802.3at Type 2  
2 x RS-232/422/485 Serial port via DB-9  
1 x Maintenance port (RJ45) for dedicated diagnostic connection  
1 x Serial console port via RJ45  
1 x Reset button  
LED indicators: PWR, RDY, ALM, GPS, POE, LTE0, LTE1, WLAN0, WLAN1, AUX0, AUX1, CPU

## Protocol Support

IP Routing, DHCP, SNMPv2, SMS (Short Message Service), NTP, NAT  
QoS Priority queuing, classification, and marking  
8 VLAN/TOS based queues for application prioritization  
NAT (dNAT & sNAT)  
IPSec Protocol  
PPPoE  
Link aggregation across LTE (different providers), Wi-Fi, and Ethernet

## Security

IPsec, DTLS, SSL  
Encryption: TKIP, AES/CCMP  
Authentication  
- 802.1X/EAP for WPA/WPA2 Enterprise  
- PSK for WPA/WPA2 Personal  
- RADIUS Server  
Port forwarding and filtering  
Captive Web Portal  
Content Filtering

## Remote Management

Centralized Management  
- Cloud-based network, device, and client monitoring  
- Network configuration

## Local Management

Serial console port  
Ethernet maintenance port

## Physical Characteristics

|                        |   |
|------------------------|---|
| Cooling design         | Fanless                                 |
| Housing                | Metal housing                           |
| Dimensions (H x W x L) | 2.6 x 7.1 x 11.7 in (67 x 181 x 298 mm) |
| Weight                 | 6.61 lb. (3 kg)                         |
| Installation           | Shelf and wall                          |

## Environmental Limits

|                                  |                              |
|----------------------------------|------------------------------|
| Functional Operating Temperature | -40 to 70 °C (-40 to 158 °F) |
| Storage Temperature              | -55 to 85 °C (-67 to 185 °F) |
| Ambient Relative Humidity        | 5% to 95% (non-condensing)   |

## Power

|                   |  |
|-------------------|--|
| Input Voltage     | 10 to 30 VDC   |
| Power Connector   | 4-pin terminal block header, male pin  |
| Power Consumption | 4.8 W Minimum (soft off)<br>15 W No external connections (idle)<br>95 W Maximum with PoE |

## Certifications

|            |                                    |
|------------|------------------------------------|
| STS-1020   | FCC, PTCRB, CE, EN 50155, EN 45545 |
| STS-1020-A | CE, CB, EN 50155, EN 45545         |

For more information, contact your sales representative or email [sales@lileesystems.com](mailto:sales@lileesystems.com).

LILEE Systems  
91 East Tasman Drive Suite 150  
San Jose, CA 95134  
+1 (408) 988-8672  
[www.lileesystems.com](http://www.lileesystems.com)

Rev. 2019.03.12